

FIG.2

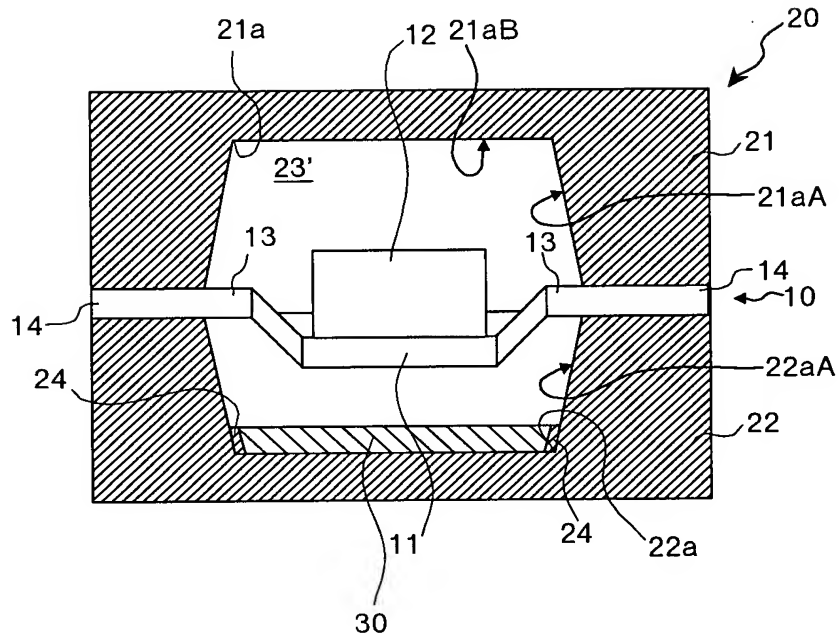


FIG.3

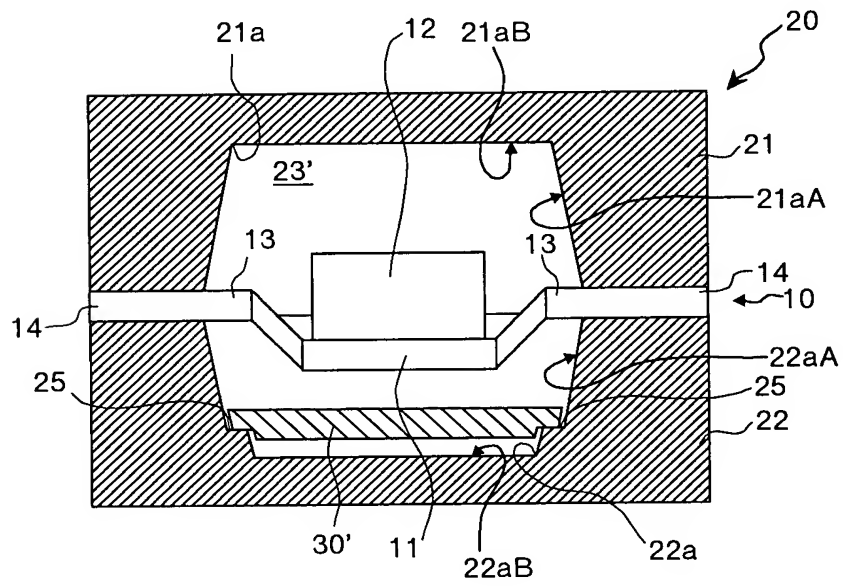


FIG.4B

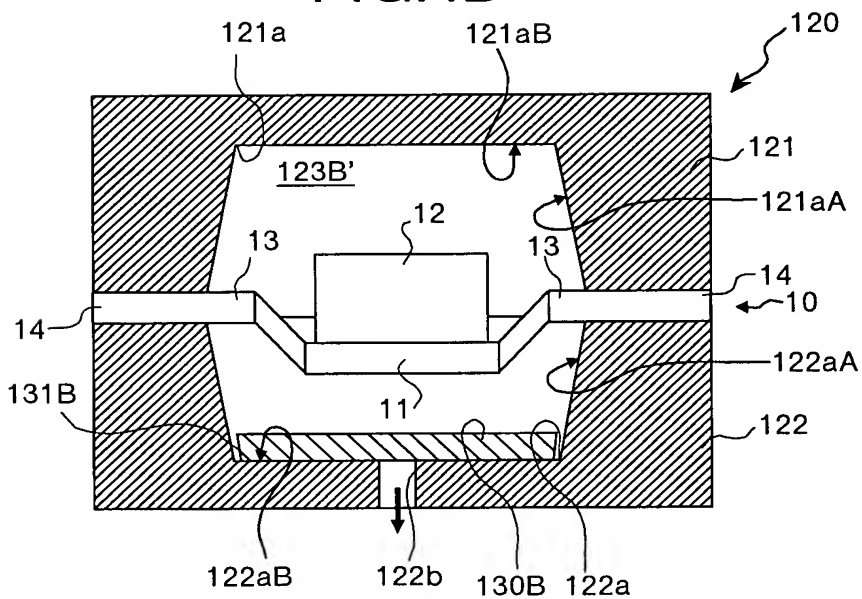


FIG.5A

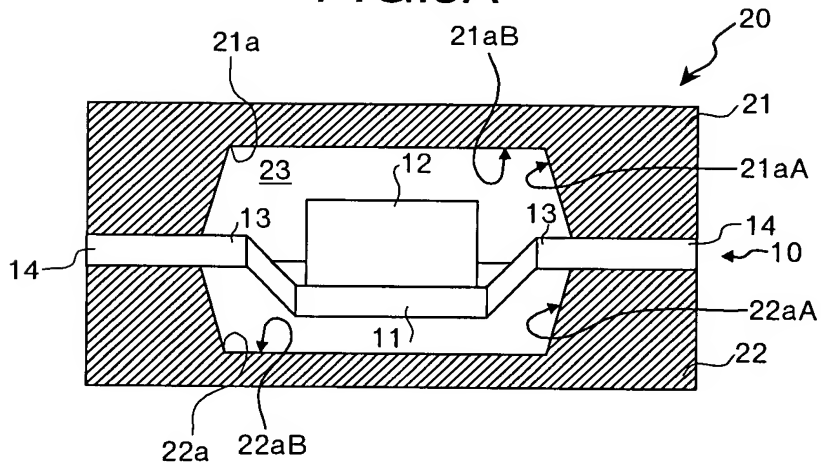


FIG.5B


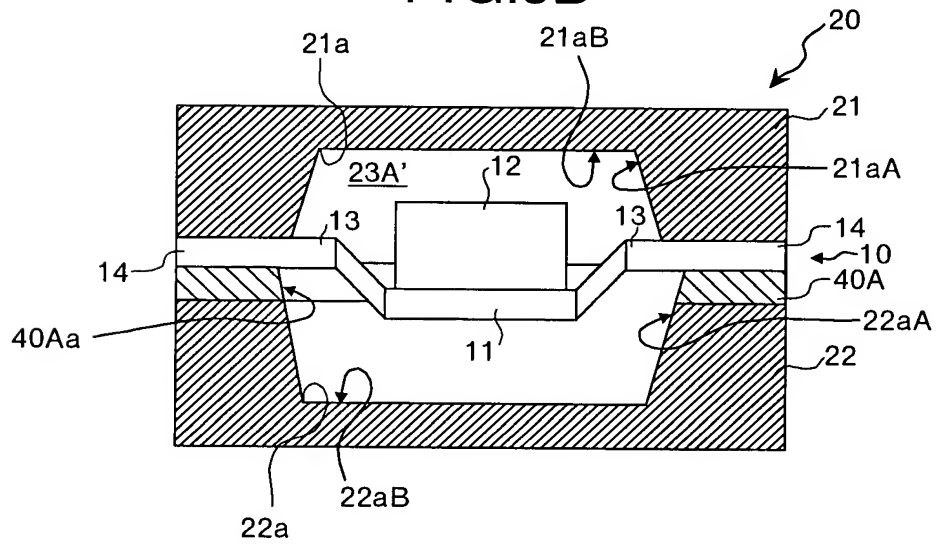


FIG.5C

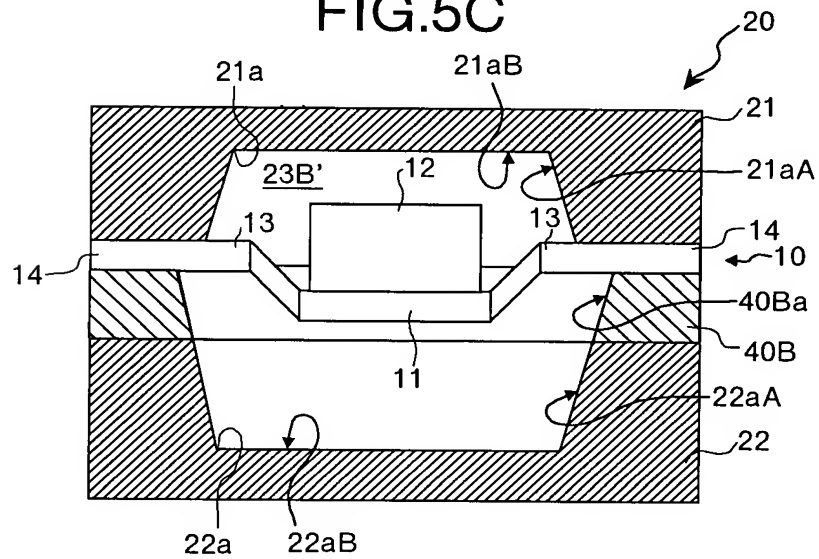



[illegible][illegible]

FIG.7

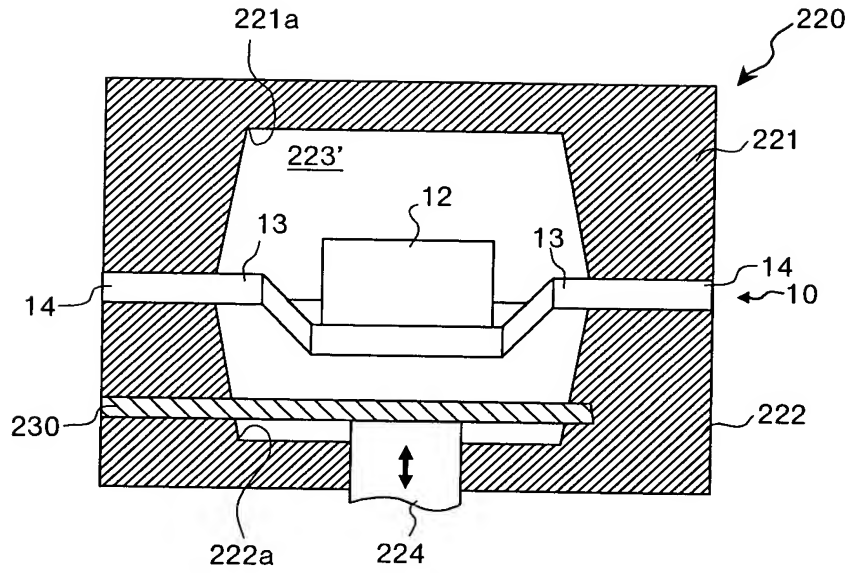


FIG.8

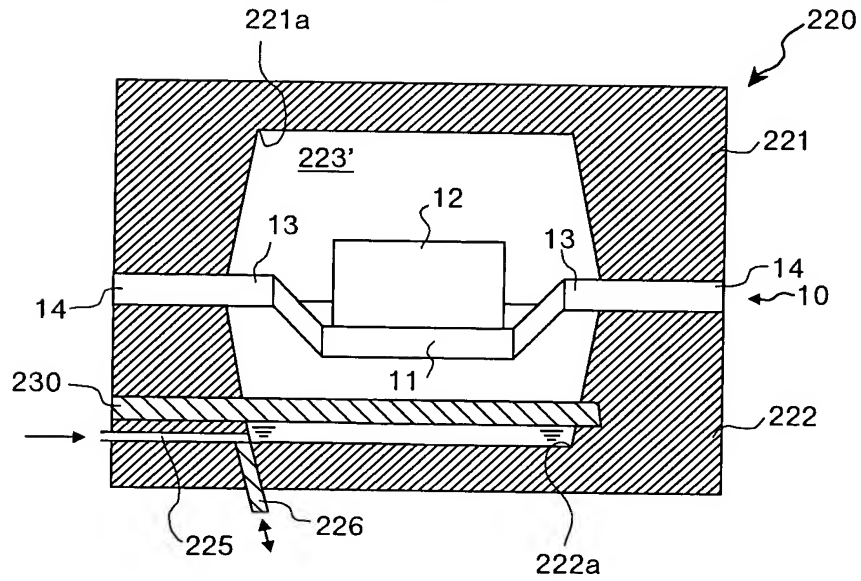


FIG.9

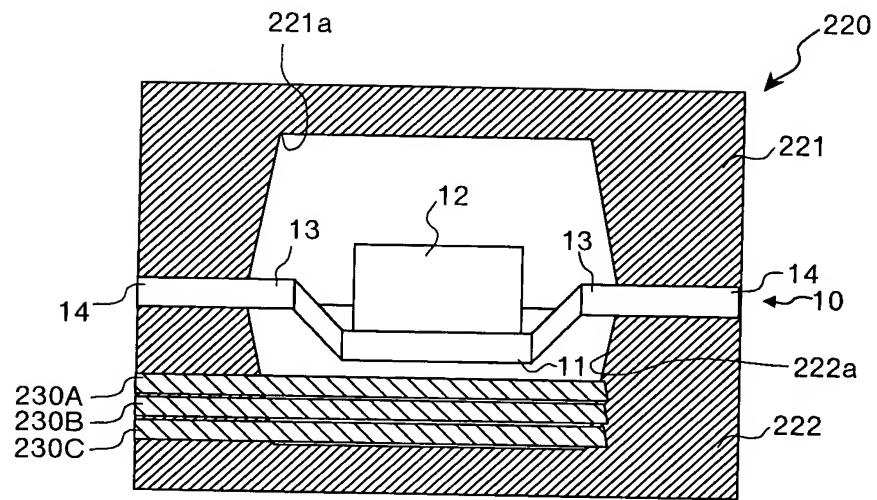


FIG.10A


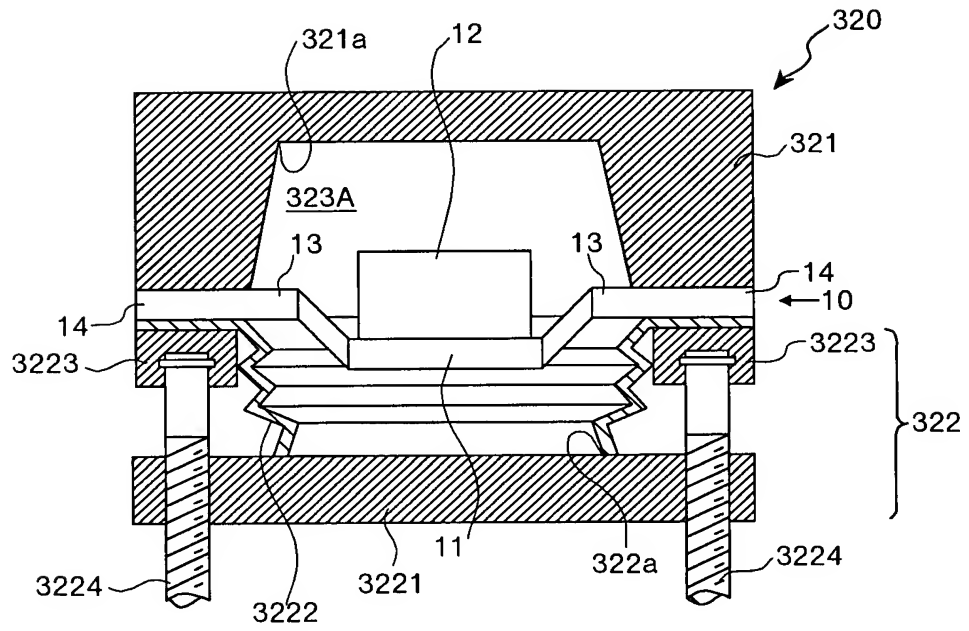


FIG.10B

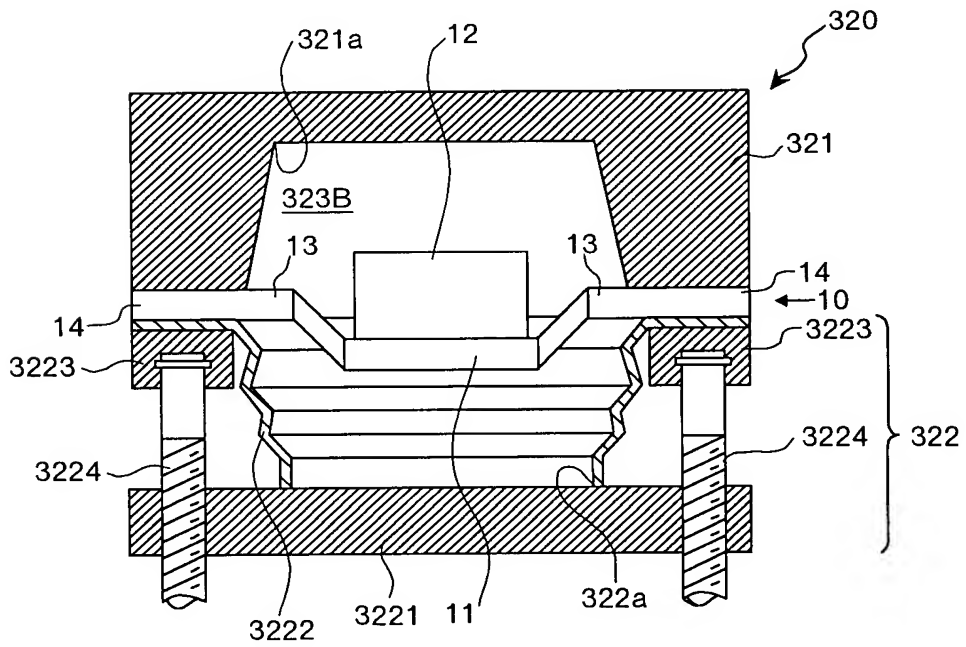



[illegible][illegible]

FIG.12A


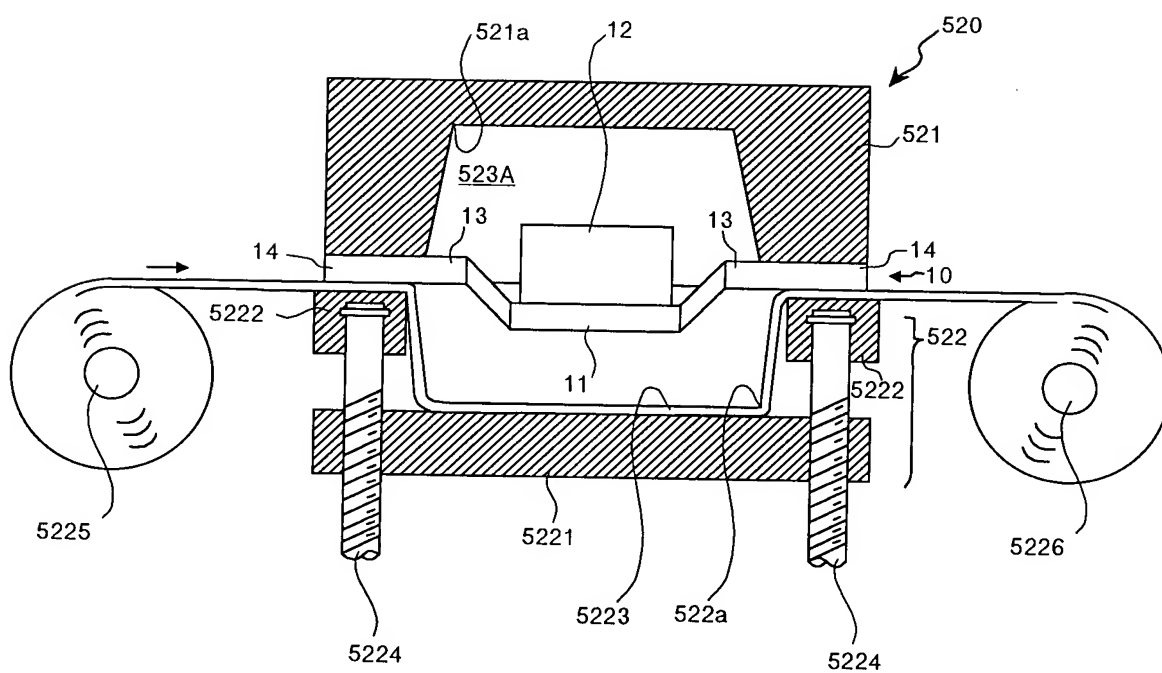


FIG.12B

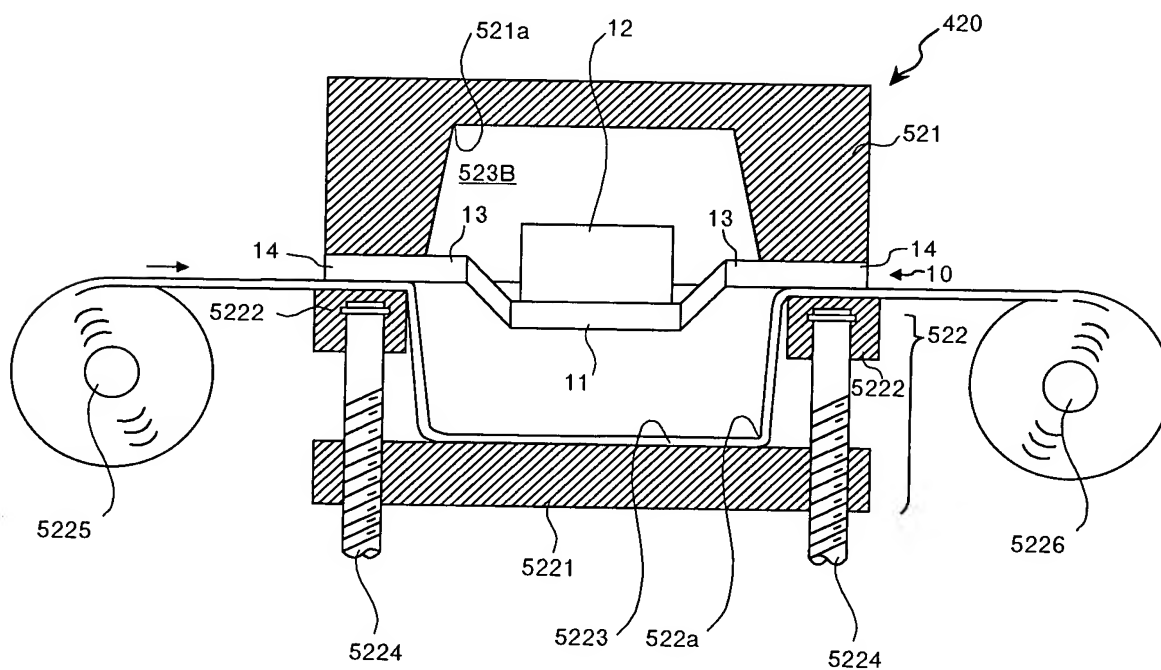

A cross-sectional view of a device. It features a central rectangular block (3) and a lower rectangular block (2) within a hexagonal housing (6). A horizontal bar (1) is on the right, and a horizontal bar is on the left. An arrow (7) points left from the right bar.

FIG.14A

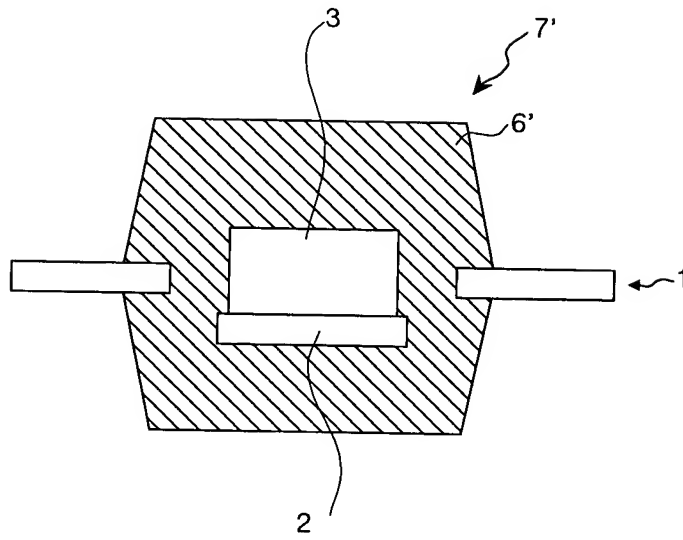


FIG.14B

